


Monocrystalline Series 10W-360W(105*105)



Products Characteristics

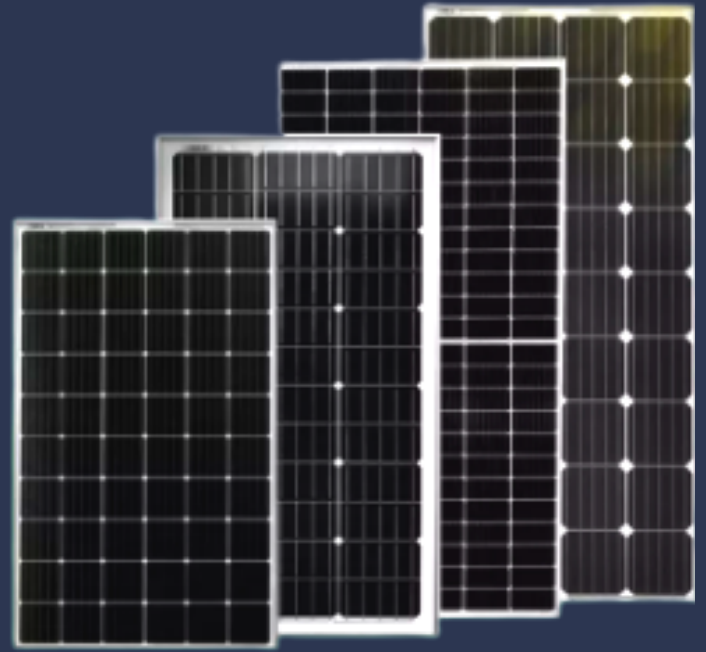

Widely using of the most popular and mature type of modules for off-grid system.



Leading manufacturing technology in PV industry, strictly controlling the quality of raw materials and the process of producing.



100% EL inspection, ensures modules are defects free.



Cells binned by current to improve module performance.



Anti reflective glass. Not only to increase the light absorption, but also to make the module has the function of self-cleaning in water environment, effectively reducing the power loss caused by dust.



Outstanding performance in low-light irradiance environments.



Excellent mechanical load resistance: Certified to withstand high wind loads(2400pa) and snow loads(5400pa).



High salt and ammonia resistance



Positive power tolerance: 0-+5w.

Warranty



5 year product warranty.



10-years 90% of Min. rated output power, and 25-years 80% of Min. rated output power warranty.

Comprehensive Certificates

- ISO Certificate
- SGS-TUV Certificate
- CQC Certificate
- IEC61215, IEC61730 Certificate
- CE Certificate



	Model No.	Pmax (W)	Dimension (mm)	Weight (kg)	Power Tolerance	Operating Temperature	Junction-Box	Application Grade	Packing	Cell Efficiency	Voc (V)	Vmp (V)	Isc (A)	Imp (A)	Cell Size (mm)				
	M-28-10	10W	270x310x17x17	3.3	0-+5W	45~+80°C	IP65/IP67	ClassA	30pieces/box	21.9%	19.6	16.0	0.67	0.63	70x30				
	M-36-20	20W	380x310x17x17	1.3	0-+5W	45~+80°C	IP65/IP67	ClassA	20pieces/box	22.6%	21.9	17.9	1.19	1.12	70x35				
	M-36-30	30W	380x450x17x17	2.0	0-+5W	45~+80°C	IP65/IP67	ClassA	10pieces/box	22.6%	24.3	19.9	1.60	1.51	105x35				
	M-32-40	40W	490x450x25x25	2.4	0-+5W	45~+80°C	IP65/IP67	ClassA	10pieces/box	22.6%	21.9	17.9	2.37	2.24	105x52.5				
	M-32-50	50W	620x450x25x25	3.1	0-+5W	45~+80°C	IP65/IP67	ClassA	6pieces/box	21.9%	21.9	17.9	2.97	2.80	105x70				
	M-36-60	60W	690x450x25x25	3.4	0-+5W	45~+80°C	IP65/IP67	ClassA	6pieces/box	22.6%	24.3	19.9	3.20	3.02					
	M-32-80	80W	900x450x25x25	4.5	0-+5W	45~+80°C	IP65/IP67	ClassA	5pieces/box	22.6%	21.9	17.9	4.74	4.47	105x105				
	M-36-90	90W	1010x450x25x25	5.0	0-+5W	45~+80°C	IP65/IP67	ClassA	5pieces/box	22.6%	24.3	19.9	4.80	4.53					
	M-60-150	150W	1120x670x28x25	8.3	0-+5W	45~+80°C	IP65/IP67	ClassA	38pieces/Pallet	22.6%	40.8	33.4	4.77	4.50					
	M-66-165	165W	1225x670x28x25	91	0-+5W	45~+80°C	IP65/IP67	ClassA	38pieces/Pallet	22.7%	44.5	36.4	4.80	4.53					
	M-66-170	170W													23.4%	44.8	36.6	4.92	4.64
	M-72-175	175W	1330x670x28x25	8.4	0-+5W	45~+80°C	IP65/IP67	ClassA	38pieces/Pallet	22.0%	48.6	39.7	4.67	4.41					
	M-72-180	180W													22.6%	48.8	39.9	4.78	4.51
	M-72-185	185W													23.3%	49.0	40.1	4.90	4.62
	M-72-190	190W													23.9%	49.3	40.3	5.00	4.72
	M-144-360	360W	1975x885x30x30	11.2	0-+5W	45~+80°C	IP65/IP67	ClassA	36pieces/Pallet	22.8%	49.4	42.0	9.03	8.57	105x70				

Glass	3.2mm Tempered Glass
Encapsulation	EVA
Backsheet	Multilayer Composite
Aluminium-Frame	Silvery/Black Anodized aluminium alloy
Cable	NA, but customized is acceptable
Connector	NA, but MC4 and MC4 Compatible are acceptable
Maximum System Voltage	700V
Maximum Series Fuse	10A
Temperature Coefficient of Isc	+0.06%
Temperature Coefficient of Voc	-0.32%
Temperature Coefficient of Pmp	-0.45%
Standard Test Condition	Irradiance:1000W/M², Cell Temperature:25°C, Spectrum AM:1.5

Engineering Drawings (Back Side)

