


BISTAR

TP8F66M
TP8F66M(H) **132 HALF-CELL**

645 - 665W

12BB half-cut mono perc

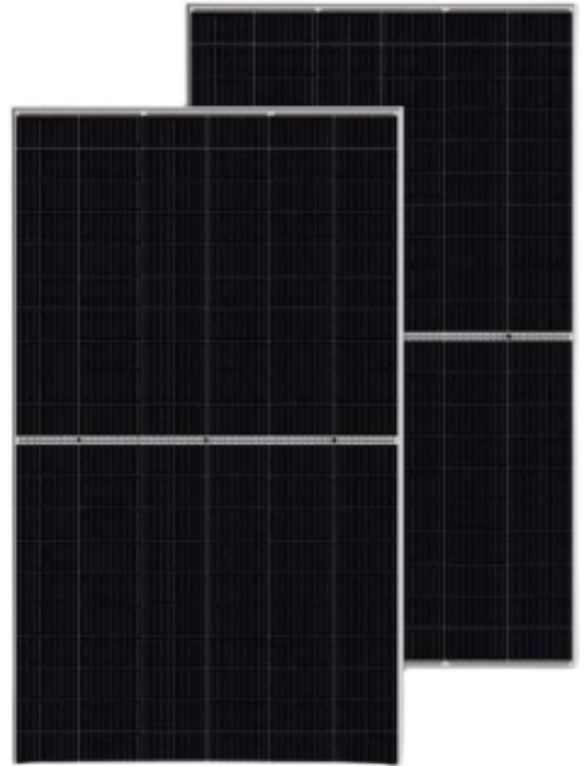

KEY FEATURES



12BB half-cut cell technology

New circuit design, lower internal current, lower Rs loss Ga-doped wafer, attenuation <2% (1st year) / ≤0.55% (Linear)



Significantly lower the risk of hot spot

Special circuit design with much lower hot spot temperature



Lower LCOE

2% more power generation, lower LCOE



Excellent Anti-PID performance

2 times of industry standard Anti-PID test by TUV SUD



IP68 junction box

High waterproof level

SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems




PERFORMANCE WARRANTY



Linear Performance Warranty

Standard Performance Warranty

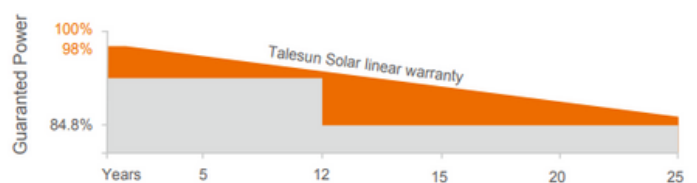

ELECTRICAL PARAMETERS

Performance at STC (Power Tolerance 0 ~ +3%)

Maximum Power (Pmax/W)	645	650	655	660	665
Operating Voltage (Vmpp/V)	37.6	37.8	38.0	38.2	38.4
Operating Current (Impp/A)	17.16	17.20	17.24	17.28	17.32
Open-Circuit Voltage (Voc/V)	45.0	45.2	45.4	45.6	45.8
Short-Circuit Current (Isc/A)	18.22	18.26	18.30	18.34	18.38
Module Efficiency η (%)	20.8	20.9	21.1	21.3	21.4

Performance at NMOT

Maximum Power (Pmax/W)	479	483	486	490	494
Operating Voltage (Vmpp/V)	35.1	35.3	35.5	35.7	35.9
Operating Current (Impp/A)	13.63	13.67	13.70	13.74	13.77
Open-Circuit Voltage (Voc/V)	42.4	42.6	42.8	43.0	43.2
Short-Circuit Current (Isc/A)	14.65	14.68	14.71	14.74	14.78


STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5

NMOT: Irradiance at 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s

MECHANICAL SPECIFICATION

Cell Type	Monocrystalline
Cell Dimensions	210*210mm
Cell Arrangement	132 (6*22)
Weight	34.5kg (76.06lbs.)
Module Dimensions	2384*1303*35mm (93.86*51.30*1.38inches)
Cable Length	Portrait 300mm/Landscape 1200mm/Customized
Cable Cross Section Size	TUV: 4mm ² (0.006inches ²)/UL: 12AWG
Front Glass	3.2mm (0.13inches) AR Coating Tempered Glass
No. of Bypass Diodes	3/6
Packing Configuration (1)	31pcs/carton, 527pcs/40hq
Packing Configuration (for USA)	31pcs/carton, 496pcs/40hq
Frame	Anodized Aluminium Alloy
Junction Box	IP68

I-V CURVE

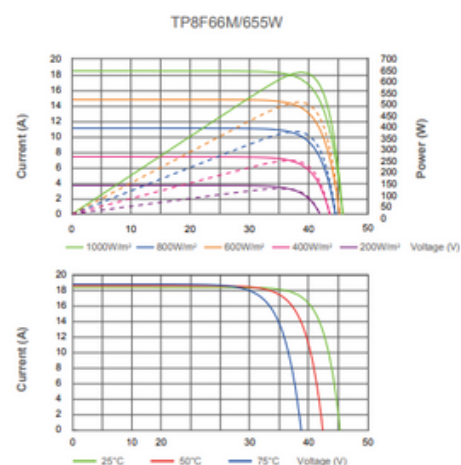

OPERATING CONDITIONS

Maximum System Voltage	1000V/1500V/DC(IEC)
Operating Temperature	-40°C ~ +85°C
Maximum Series Fuse	30A
Static Loading	Snow Loading: 5400Pa/ Wind Loading: 2400Pa
Conductivity at Ground	≤0.1Ω
Safety Class	II
Resistance	≥100MΩ
Connector	PV-02/LJQ-3/LJQ-3-CSY/MC4-EVO2

TEMPERATURE COEFFICIENT

Temperature Coefficient Pmax	-0.36%/°C
Temperature Coefficient Voc	-0.26%/°C
Temperature Coefficient Isc	+0.043%/°C
NMOT	43±2°C

TECHNICAL DRAWINGS

