


BISTAR

TP6F78M
TP6F78M(H) **156 HALF-CELL**

425 - 445 W

9BB half-cut mono perc

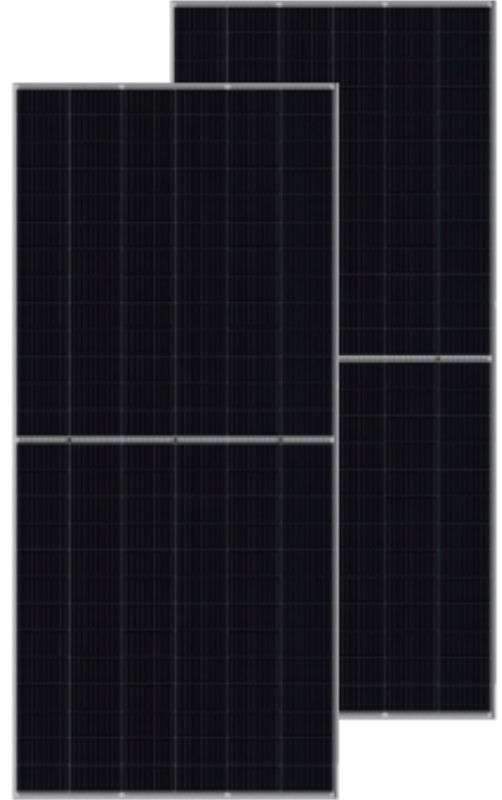

KEY FEATURES



9BB half-cut cell technology

New circuit design, lower internal current, lower R_s loss



Significantly lower the risk of hot spot

Special circuit design with much lower hot spot temperature



Lower LCOE

2% more power generation, lower LCOE



Anti
PID

Excellent Anti-PID performance

2 times of industry standard Anti-PID test by TUV SUD



IP68 junction box

High waterproof level

SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 1703
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems



PERFORMANCE WARRANTY



Linear Performance Warranty

Standard Performance Warranty

