



Supplied by




# AS-6M30-BHC

## 325W~345W

### MONOCRYSTALLINE MODULE

#### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- More power gains up to 30% by utilizing the ambient light reflected from surrounding surfaces.
- Lower annual power degradation and higher energy yield during the module's lifetime.
- Superior performance under high temperature and low light conditions.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc.).
- Potential induced degradation (PID) free.

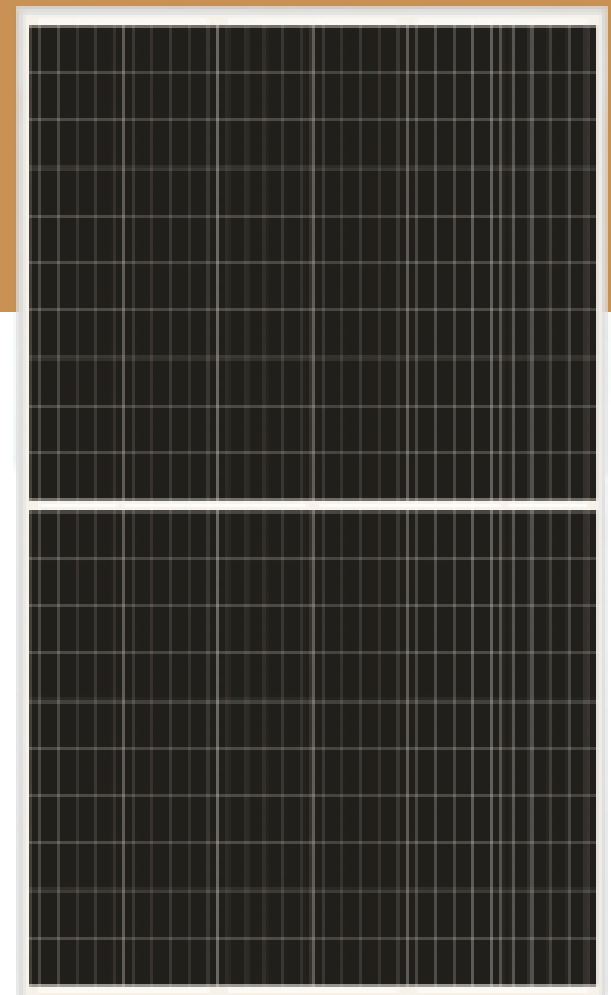


#### CERTIFICATIONS

- IEC 61215, IEC 61730, CE
- ISO9001:2015: Quality management system
- ISO14001:2015: Environmental management system
- ISO 45001:2018: Occupational health and safety management system



#### SPECIAL WARRANTY

- 20 years product warranty
- 30 years linear power output warranty

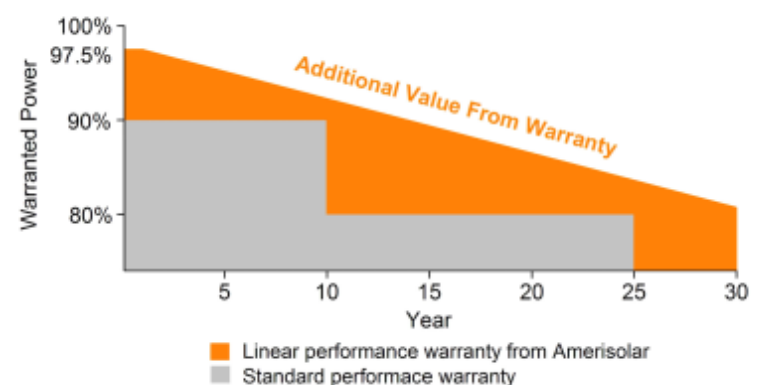

## ELECTRICAL CHARACTERISTICS AT STC\*

Module Type	AS-6M30-BHC-325W	AS-6M30-BHC-330W	AS-6M30-BHC-335W	AS-6M30-BHC-340W	AS-6M30-BHC-345W
Maximum Power (Pmax)	325	330	335	340	345
Open Circuit Voltage (VOC)	40.6	40.8	41.0	41.2	41.4
Short Circuit Current (ISC)	10.08	10.16	10.24	10.32	10.40
Voltage at Maximum Power (Vmp)	34.0	34.2	34.4	34.6	34.8
Current at Maximum Power (Imp)	9.56	9.65	9.74	9.83	9.92
Module Efficiency (%)	19.26	19.56	19.85	20.75	20.45
Operating Temperature	-40°C to +85°C				
Maximum System Voltage	1000V DC/1500V DC				
Fire Resistance Rating	Class C				
Maximum Series Fuse Rating	20A				

\*STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5; Tolerance of Pmax: ±3%; Measurement Tolerance: ±3%

## ELECTRICAL CHARACTERISTICS AT NOCT\*\*

Maximum Power (Pmax)	243	247	251	255	259
Open Circuit Voltage (VOC)	37.3	37.5	37.7	37.9	38.1
Short Circuit Current (ISC)	8.16	8.22	8.28	8.34	8.40
Voltage at Maximum Power (Vmp)	30.9	31.1	31.3	31.5	31.7
Current at Maximum Power (Imp)	7.87	7.95	8.02	8.10	8.18

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind Speed 1 m/s

## ELECTRICAL CHARACTERISTICS WITH DIFFERENT REAR SIDE POWER GAIN (EXAMPLE: AS-6M30-BHC-335W)

Power Gain	Pmax	VOC	ISC	Vmp	Imp
10%	369	41.0	11.29	34.4	10.24
15%	385	41.0	11.78	34.4	10.73
20%	402	41.0	12.30	34.4	11.19
25%	419	41.0	12.82	34.4	12.19
30%	436	41.0	13.34	34.4	12.68

## MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline bifacial
Number of cells	120 (6x20)
Module dimensions	1684x1002x35mm
Weight	18.5kg
Front cover	3.2mm tempered glass with AR coating
Back cover	Transparent backsheet
Frame	Anodized aluminum alloy
Junction box	IP68, 3 diodes
Cable	4mm <sup>2</sup> , Length: Portrait: 300mm; Landscape: 1150mm
Connector	MC4 compatible


## TEMPERATURE COEFFICIENT

Nominal Operating Cell Temperature (NOCT)	42°C±2°C
Temperature Coefficients of Pmax	-0.36%/°C
Temperature Coefficients of VOC	-0.28%/°C
Temperature Coefficients of ISC	0.05%/°C

## PACKAGING

Standard packaging	31pcs/pallet
Module quantity per 20' container	372pcs
Module quantity per 40' container	806pcs(GP)/884pcs(HQ)

## ENGINEERING DRAWINGS

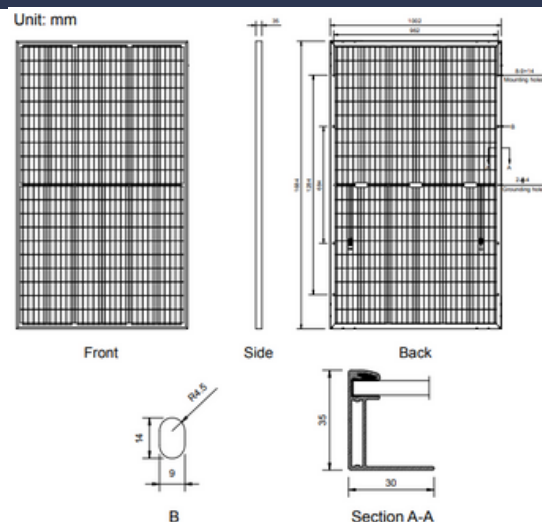

## IV CURVES

