




BIPRO

TD6G72M 144 HALF-CELL

390 - 410W

bifacial dual glass
9BB half-cut mono perc

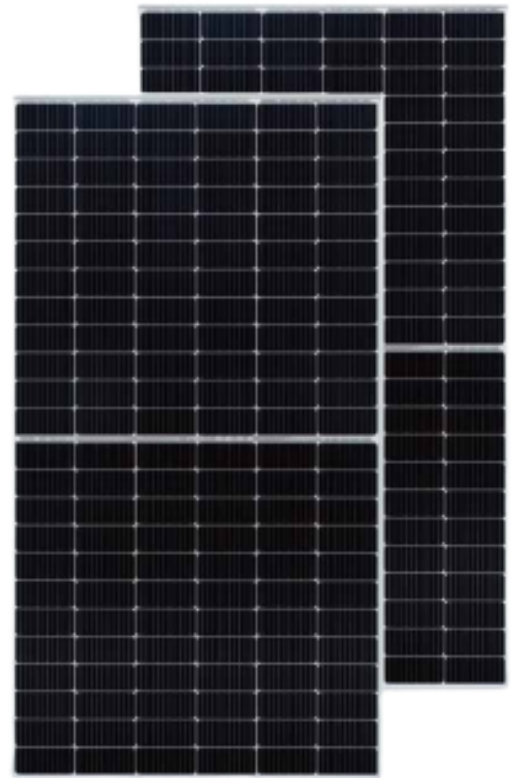

KEY FEATURES



9BB half-cut cell technology

New circuit design, lower internal current, lower R_s loss



Industry leading high yield

Bifacial PERC cell technology,
5%-25% more yield depends on different conditions



Excellent Anti-PID performance

2 times of industry standard Anti-PID test by TUV SUD



Wider application

No water-permeability and high wear-resistance,
can be widely used in high-humid, windy and dusty area



IP68 junction box

High waterproof level

SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 1703
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems




PERFORMANCE WARRANTY

12 years
Quality assurance

30 years
Power output guarantee

Linear Performance Warranty
Standard Performance Warranty

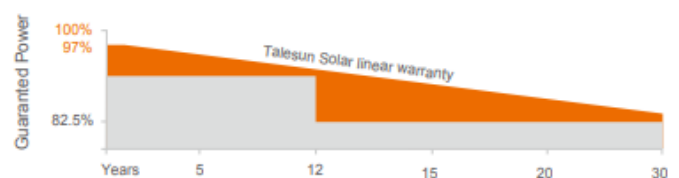

ELECTRICAL PARAMETERS

Performance at STC (Power Tolerance 0 ~ +3%)

Maximum Power (Pmax/W)	390	395	400	405	410
Operating Voltage (Vmpp/V)	40.2	40.5	40.8	41.1	41.4
Operating Current (Impp/A)	9.71	9.76	9.81	9.86	9.91
Open-Circuit Voltage (Voc/V)	48.5	48.7	48.9	49.1	49.3
Short-Circuit Current (Isc/A)	10.25	10.29	10.33	10.37	10.41
Module Efficiency η_m (%)	19.0	19.2	19.5	19.7	20.0

Performance at NMOT

Maximum Power (Pmax/W)	290	294	298	301	305
Operating Voltage (Vmpp/V)	38.0	38.3	38.6	38.8	39.1
Operating Current (Impp/A)	7.64	7.68	7.72	7.77	7.82
Open-Circuit Voltage (Voc/V)	45.7	45.9	46.1	46.3	46.4
Short-Circuit Current (Isc/A)	8.25	8.28	8.35	8.35	8.38

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5

NMOT: Irradiance at 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s

Electrical characteristics with different rear side power gain (refer to 400W front)

Pmax gain	Pmax/W	Vmpp/V	Impp/A	Voc/V	Isc/A
5%	420	40.8	10.30	48.9	10.84
10%	440	40.8	10.79	48.9	11.36
15%	460	40.8	11.28	48.9	11.87
20%	480	40.8	11.77	48.9	12.39
25%	500	40.8	12.26	48.9	12.91

MECHANICAL SPECIFICATION

Cell Type	Monocrystalline
Cell Dimensions	158.75*158.75mm
Cell Arrangement	144 (6*24)
Weight	26.8kg (59.08lbs)
Module Dimensions	2031*1011*30mm (79.96*39.8*1.18inches)
Cable Length	Portrait 300mm/Landscape 1200mm/Customized
Cable Cross Section Size	TUV: 4mm ² (0.006inches ²) /UL: 12AWG
Front Glass	2.0mm (0.08 inches) AR Coating Semi-tempered Glass
Back Glass	2.0mm (0.08 inches) Glazed Semi-tempered Glass
No. of Bypass Diodes	3/6
Packing Configuration (1)	35pcs/carton, 770pcs/40hq
Packing Configuration (for USA)	32pcs/carton, 672pcs/40hq
Frame	Anodized Aluminium Alloy
Junction Box	IP68


OPERATING CONDITIONS

Maximum System Voltage	1500V/DC(IEC)
Operating Temperature	-40°C ~ +85°C
Maximum Series Fuse	20A
Static Loading	Snow Loading: 5400Pa/ Wind Loading: 2400Pa
Conductivity at Ground	$\leq 0.1\Omega$
Safety Class	II
Resistance	$\geq 100M\Omega$
Connector	T01/LJQ-3-CSY/MC4/MC4-EVO2
Backside Output Ratio*	70%+(+5% ~ -10%)
Under STC: Backside Output Ratio = Pmax(rear) / Pmax(front)	

TEMPERATURE COEFFICIENT

Temperature Coefficient Pmax	-0.36%/°C
Temperature Coefficient Voc	-0.26%/°C
Temperature Coefficient Isc	+0.043%/°C
NMOT	43±2°C

I-V CURVE

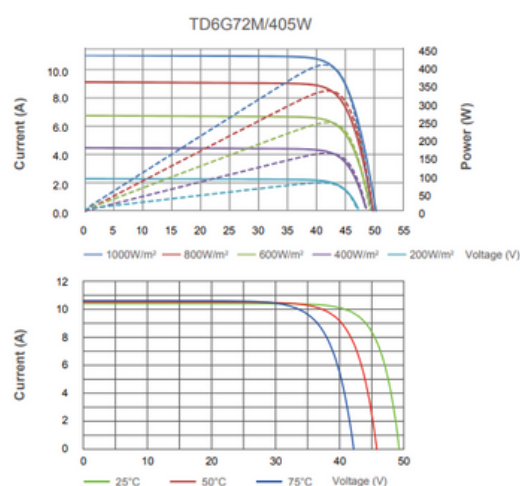

TECHNICAL DRAWINGS

