


Monocrystalline Series 45W-200W(158.75*158.75)



Products Characteristics

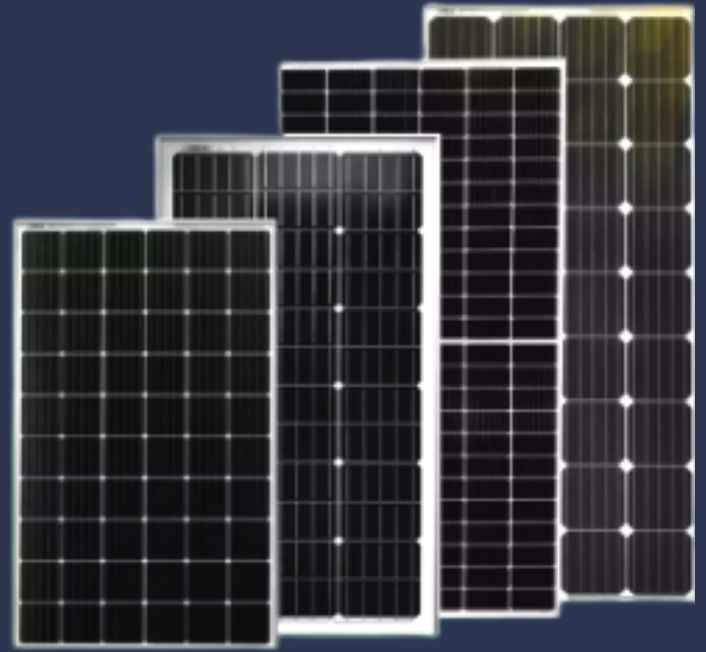

Widely using of the most popular and mature type of modules for off-grid system.



Leading manufacturing technology in PV industry, strictly controlling the quality of raw materials and the process of producing.



100% EL inspection, ensures modules are defects free.



Cells binned by current to improve module performance.



Anti reflective glass. Not only to increase the light absorption, but also to make the module has the function of self-cleaning in water environment, effectively reducing the power loss caused by dust.



Outstanding performance in low-light irradiance environments.



Excellent mechanical load resistance: Certified to withstand high wind loads(2400pa) and snow loads(5400pa).



High salt and ammonia resistance



Positive power tolerance: 0-+5w.

Warranty



5 year product warranty.

















10-years 90% of Min. rated output power, and 25-years 80% of Min. rated output power warranty.

Comprehensive Certificates

- ISO Certificate
- SGS-TUV Certificate
- CQC Certificate
- IEC61215, IEC61730 Certificate
- CE Certificate



	Model No.	Pmax (W)	Dimension (mm)	Weight (kg)	Power Tolerance	Operating Temperature	Junction-Box	Application Grade	Packing	Cell Efficiency	Voc (V)	Vmp (V)	Isc (A)	Imp (A)	Cell Size (mm)	
	M5-36-45	45W	540x510x25x25	3.3	0-+5W	45~+80°C	IP65/IP67	ClassA	6pieces/box	20.6%	25.1	20.5	2.49	2.35	158.75x39	
	M5-36-50	50W								22.8%	23.9	20.5	2.59	2.44		
	M5-36-60	60W	700x510x25x25	4.5	0-+5W	45~+80°C	IP65/IP67	ClassA	6pieces/box	20.3%	25.1	20.5	3.10	2.93	158.75x52.9	
	M5-36-65	65W								22.2%	25.1	20.5	3.36	3.17		
	M5-36-75	75W	820x510x25x25	4.9	0-+5W	45~+80°C	IP65/IP67	ClassA	5 pieces/box	21.5%	25.1	20.5	3.88	3.66	158.75x63.5	
	M5-36-80	80W								22.6%	24.0	20.5	4.14	3.91	158.75x79	
	M5-36-100	100W	780x670x25x25	5.9	0-+5W	45~+80°C	IP65/IP67	ClassA	5 pieces/box	22.6%	25.1	20.5	5.17	4.44	158.75x95.25	
	M5-36-115	115W	920x670x28x25	6.9	0-+5W	45~+80°C	IP65/IP67	ClassA	4pieces/box	21.6%	25.1	20.5	5.95	5.61		
	M5-36-120	120W								22.5%	25.1	20.5	6.21	5.86		
	M5-36-130	130W	1020x670x28x25	7.7	0-+5W	45~+80°C	IP65/IP67	ClassA	4pieces/box	21.9%	25.1	20.5	6.73	6.35	158.75x106	
		M5-36-135								135W	22.7%	25.1	20.5	6.99		6.59
	M5-36-145	145W	1120x670x28x25	8.4	0-+5W	45~+80°C	IP65/IP67	ClassA	38pieces/Pallet	21.8%	25.1	20.5	7.50	7.07	158.75x117	
		M5-36-150								150W	22.5%	25.1	20.5	7.76		7.32
	M5-32-180	180W	1310x670x28x25	10.0	0-+5W	45~+80°C	IP65/IP67	ClassA	38pieces/Pallet	22.8%	22.5	18.4	10.37	9.79	158.75x158.75	
	M5-36-190	190W	1480x670x28x25	11.2	0-+5W	45~+80°C	IP65/IP67	ClassA	38pieces/Pallet	21.8%	25.1	20.5	9.83	9.27		
		M5-36-195								195W	22.4%	25.1	20.5	10.08		9.51
		M5-36-200								200W	23.1%	23.9	20.5	10.34		9.76

Glass	3.2mm Tempered Glass
Encapsulation	EVA
Backsheet	Multilayer Composite
Aluminium-Frame	Silvery/Black Anodized aluminium alloy
Cable	NA, but customized is acceptable
Connector	NA, but MC4 and MC4 Compatible are acceptable
Maximum System Voltage	700V
Maximum Series Fuse	10A
Temperature Coefficient of Isc	+0.06%
Temperature Coefficient of Voc	-0.32%
Temperature Coefficient of Pmp	-0.45%
Standard Test Condition	Irradiance:1000W/M ² , Cell Temperature:25°C, Spectrum AM:1.5

Engineering Drawings (Back Side)

